

## Premium Solution with Super-High Speed AC1750 for Elite Performance

WAP1750

3 x 3 AC Dual-Band Wall-Mount PoE Access Point



The WAP1750 is a premium wireless solution designed for SMBs which demand elite network performance. The product features the latest 3 x 3 IEEE 802.11ac

technology for concurrent dual-band wireless speeds up to 1750Mbps. A wall-mounted design and industrial-grade build quality combined with user-friendly operation and an extensive feature set, make an ideal high-performance dual-band solution for demanding day-to-day enterprise operations.

For businesses that demand security, flexibility and speed – the Edimax Pro series has a wide range of potential applications from office environments to schools, campuses, hotels and hospitals. Multiple SSIDs can be configured for different departments or user groups and a built-in RADIUS server provides additional verification with a scalable AP array architecture for central management of multiple access points. High-density capacity for up to 100 simultaneous clients ideal for BYOD workplaces or other environments with a high volume of clients and wireless devices, and fast roaming allows for seamless transitions between multiple access points. Power over Ethernet support (PoE) and an intuitive web-based management interface provide deployment flexibility and extensive management options for company MIS departments and network administrators. An optional security cover also prevents physical theft or tampering, along with a rogue AP detection function to safeguard your network from unauthorized access.


When performance and security are critical for your business, you need products that are engineered for your industry. The Edimax Pro series is designed to help your business and provide the connectivity that you rely on every day, with safety and effectiveness guaranteed, and the WAP1750 offers the highest level of wireless performance on the market today.

### KEY FEATURES


- 802.11AC Dual-Band High Speed:** IEEE 802.11ac concurrent dual-band with 1750Mbps wireless speed.
- Easy Installation:** Wall-mount design with easy installation kit.
- Designed for High Density Usage:** Supports up to a hundred users simultaneously, ideal for crowded environments and BYOD (Bring Your Own Device) workplaces.
- Multiple SSIDs for Security Management:** Supports up to 32 SSIDs (16 x 2.4GHz & 16 x 5GHz) ideal for multiple departments, user groups, customers or guests.
- Fast Roaming:** Roams smoothly between APs without lag or interruption, ensuring top performance for video and voice streaming applications.
- Wide Coverage & High Sensitivity:** Adjustable RF output power and high receiver sensitivity for wide coverage across large spaces.
- Seamless Mobility:** 1.5x greater coverage than typical APs for blanket coverage to ensure seamless connectivity for Wi-Fi devices across enterprise environments.
- Power over Ethernet:** Supports IEEE 802.3at PoE and IEEE 802.3af PSE out as well as included power adapter.
- Built-In RADIUS Server:** With management for up to 256 user accounts.
- Business Environments:** Advanced choice for high-performance applications. Suitable for a wide range of commercial applications such as offices, hotels, meeting rooms, schools, campuses, resorts, retail and others.
- Central Management:** Edimax Pro Network Management Suite (NMS), easy and intuitive web-based central management suite, supports AP array architecture.
- Optional Security Cover:** Prevents theft and tampering.

## Wide Coverage & Multiple SSIDs


## BYOD Solution & High Density Networking

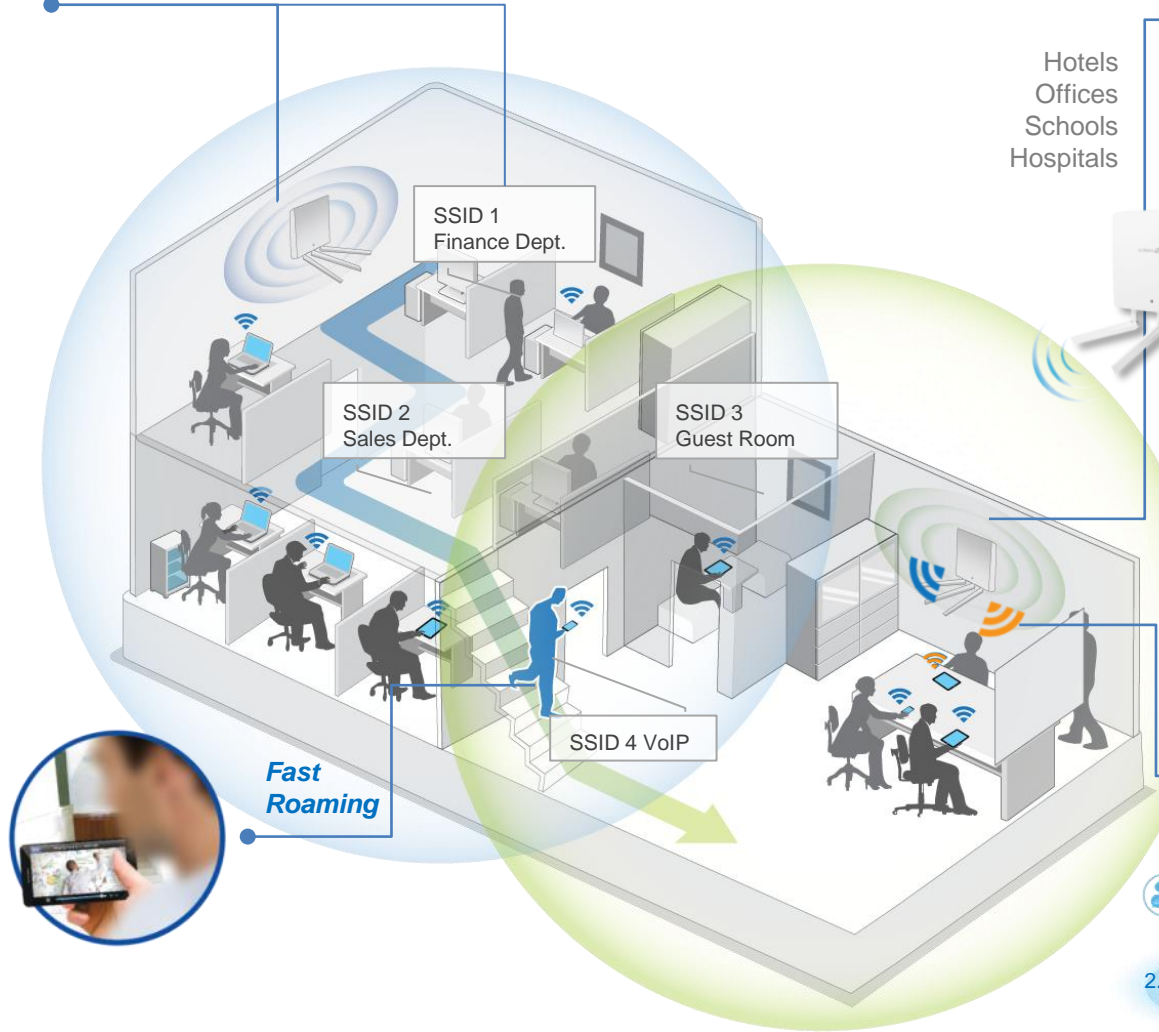


Hotels  
Offices  
Schools  
Hospitals

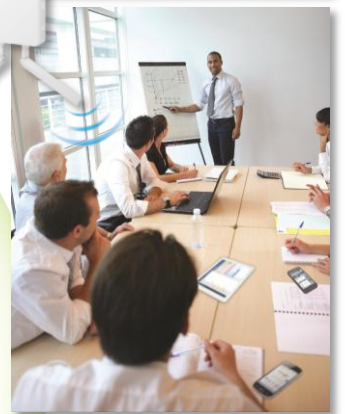


### Current Dual-Band




**2.4GHz**  
2D Radiation Pattern@ Vertical

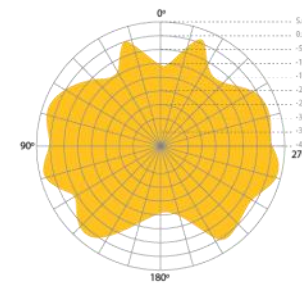

**5GHz**  
2D Radiation Pattern@ Vertical



**2.4GHz**  
2D Radiation Pattern@ Horizontal



**5GHz**  
2D Radiation Pattern@ Horizontal

## Central Network Management Suite



Edimax Pro NMS (Network Management Suite) is a web-based wireless network management system. Company MIS persons can plan and manage Edimax Pro access points' powerful functionality according to their office space using an easy, remote web-based interface which includes a dashboard, map view, traffic statistics and wireless client list for network-wide remote administration. RADIUS settings, WLAN group settings, access control, guest network settings and firmware upgrades can all be managed centrally from a single location to reduce network downtime, aid troubleshooting and optimize network performance. Zone plans and setup wizards are also available for expanding and managing large networks with multiple access points.

# 3 x 3 AC Dual-Band Wall-Mount PoE Access Point

## SPECIFICATIONS

Hardware	
LAN Interface	Giga x 2
PoE	802.3at (in) / 802.3af (out)
Antenna	Type: 3 x External / Gain: 2dBi (2.4GHz), 2dBi (5GHz)
Power	DC: 12V / 4A 802.3at (PoE Injector Optional)
Dimensions (L x W x H)	18.3 x 18.3 x 3.6 cm
Weight	560g
Power Consumption (Full Loading)	15W (Exclude PoE-Out)
Mounting	Wall / Desktop
Console	RJ45
WPS/Reset	Y
LED Indicator	1. Power LED 2. Diag LED
Environmental Conditions	Operating Temperature: 0°C (32°F) to 50°C (122°F) Operating Humidity: 90% or Less
Power Saving	802.3az
Internal Buzzer	Y
Security Cover	Y (Optional)
Wireless	
Standard	802.11 a/b/g/n/ac Concurrent Dual-Band
No. of Radios	2
Receiver Sensitivity	≤ -94.5dBm
Certification	CE/FCC
Fast Roaming	Y
Number of SSIDs	16 (2.4GHz) + 16 (5GHz)
Performance	
Maximum Data Speed	450 + 1300Mbps
Concurrent Clients	Up to 50 Per Radio
Software	
Wireless Mode	AP / WDS AP / WDS Bridge
802.1q VLAN	Y (VID = 1-4095)
Spanning Tree	RSTP
QoS	WMM (802.11e) Max Associated Station No.
Pass-Through	IPv6 and VPN (PPTP, L2TP/IPsec)
DSCP (802.1p)	Y
Multicast Rate up to 54Mbps	Y
Management	
Deployment	Standalone Managed by Edimax Pro NMS
Configuration	HTTP/HTTPS SNMP v1, v2c, v3 CLI (Telnet, SSH)
RADIUS Server	Built-In
Auto-Channel	Y
Private MIB	Y



RF Specifications			
Frequency Band	<ul style="list-style-type: none"> <li>Radio I : 802.11b/g/n 2.412~2.484(GHz)</li> <li>Radio II : 802.11a/n/ac 5.18~5.24(GHz), 5.745~5.825(GHz)</li> </ul> (The supported frequency band is restricted by local regulations.)		
Operation Channels	<ul style="list-style-type: none"> <li>2.4GHz : US/Canada 1-11 / Europe 1-13 / Japan 1-14</li> <li>5GHz : Country dependent for the following ranges: 36, 40, 44, 48, 149, 153, 157, 161, 165</li> </ul>		
Transmit Power	<table border="0"> <tr> <td style="vertical-align: top;">           802.11b            23dBm@1Mbps            23dBm@2Mbps            23dBm@5.5Mbps            23dBm@11Mbps            802.11g            23dBm@6Mbps            23dBm@9Mbps            23dBm@12Mbps            23dBm@18Mbps            23dBm@24Mbps            22dBm@36Mbps            20dBm@48Mbps            19dBm@54Mbps            802.11n (2.4G)            27.5dBm@MCS0/8/16            26.5dBm@MCS1/9/17            26.5dBm@MCS2/10/18            26.5dBm@MCS3/11/19            25.5dBm@MCS4/12/20            24.5dBm@MCS5/13/21            23.5dBm@MCS6/14/22            22.5dBm@MCS7/15/23         </td> <td style="vertical-align: top;">           802.11a            22dBm@6Mbps            22dBm@9Mbps            22dBm@12Mbps            22dBm@18Mbps            22dBm@24Mbps            21dBm@36Mbps            19dBm@48Mbps            18dBm@54Mbps            802.11an(5G)            27.5dBm@MCS0/8/16            26.5dBm@MCS1/9/17            26.5dBm@MCS2/10/18            25.5dBm@MCS3/11/19            24.5dBm@MCS5/13/21            23.5dBm@MCS6/14/22            22.5dBm@MCS7/15/23            802.11ac            27.5dBm@MCS0            26.5dBm@MCS1            26.5dBm@MCS2            25.5dBm@MCS3            25.5dBm@MCS4            24.5dBm@MCS5            23.5dBm@MCS6            22.5dBm@MCS7            20.5dBm@MCS8            19.5dBm@MCS9         </td> </tr> </table>	802.11b 23dBm@1Mbps 23dBm@2Mbps 23dBm@5.5Mbps 23dBm@11Mbps 802.11g 23dBm@6Mbps 23dBm@9Mbps 23dBm@12Mbps 23dBm@18Mbps 23dBm@24Mbps 22dBm@36Mbps 20dBm@48Mbps 19dBm@54Mbps 802.11n (2.4G) 27.5dBm@MCS0/8/16 26.5dBm@MCS1/9/17 26.5dBm@MCS2/10/18 26.5dBm@MCS3/11/19 25.5dBm@MCS4/12/20 24.5dBm@MCS5/13/21 23.5dBm@MCS6/14/22 22.5dBm@MCS7/15/23	802.11a 22dBm@6Mbps 22dBm@9Mbps 22dBm@12Mbps 22dBm@18Mbps 22dBm@24Mbps 21dBm@36Mbps 19dBm@48Mbps 18dBm@54Mbps 802.11an(5G) 27.5dBm@MCS0/8/16 26.5dBm@MCS1/9/17 26.5dBm@MCS2/10/18 25.5dBm@MCS3/11/19 24.5dBm@MCS5/13/21 23.5dBm@MCS6/14/22 22.5dBm@MCS7/15/23 802.11ac 27.5dBm@MCS0 26.5dBm@MCS1 26.5dBm@MCS2 25.5dBm@MCS3 25.5dBm@MCS4 24.5dBm@MCS5 23.5dBm@MCS6 22.5dBm@MCS7 20.5dBm@MCS8 19.5dBm@MCS9
802.11b 23dBm@1Mbps 23dBm@2Mbps 23dBm@5.5Mbps 23dBm@11Mbps 802.11g 23dBm@6Mbps 23dBm@9Mbps 23dBm@12Mbps 23dBm@18Mbps 23dBm@24Mbps 22dBm@36Mbps 20dBm@48Mbps 19dBm@54Mbps 802.11n (2.4G) 27.5dBm@MCS0/8/16 26.5dBm@MCS1/9/17 26.5dBm@MCS2/10/18 26.5dBm@MCS3/11/19 25.5dBm@MCS4/12/20 24.5dBm@MCS5/13/21 23.5dBm@MCS6/14/22 22.5dBm@MCS7/15/23	802.11a 22dBm@6Mbps 22dBm@9Mbps 22dBm@12Mbps 22dBm@18Mbps 22dBm@24Mbps 21dBm@36Mbps 19dBm@48Mbps 18dBm@54Mbps 802.11an(5G) 27.5dBm@MCS0/8/16 26.5dBm@MCS1/9/17 26.5dBm@MCS2/10/18 25.5dBm@MCS3/11/19 24.5dBm@MCS5/13/21 23.5dBm@MCS6/14/22 22.5dBm@MCS7/15/23 802.11ac 27.5dBm@MCS0 26.5dBm@MCS1 26.5dBm@MCS2 25.5dBm@MCS3 25.5dBm@MCS4 24.5dBm@MCS5 23.5dBm@MCS6 22.5dBm@MCS7 20.5dBm@MCS8 19.5dBm@MCS9		
Receiver Sensitivity	<table border="0"> <tr> <td style="vertical-align: top;">           802.11b            ≤-93dBm@1Mbps            ≤-90dBm@11Mbps            802.11g            ≤-90dBm@6Mbps            ≤-74dBm@54Mbps            802.11n (2.4G)            ≤-94.5dBm@MCS0            ≤-76.5dBm@MCS7            ≤-90dBm@MCS8            ≤-72dBm@MCS15            ≤-90dBm@MCS16            ≤-72dBm@MCS23         </td> <td style="vertical-align: top;">           802.11a            ≤-90dBm@6Mbps            ≤-72dBm@54Mbps            802.11an(5G)            ≤-94.5dBm@MCS0            ≤-70.5dBm@MCS7            ≤-90dBm@MCS8            ≤-66dBm@MCS15            ≤-90dBm@MCS16            ≤-66dBm@MCS23            802.11ac            ≤-90.5dBm@MCS0            ≤-60.5dBm@MCS9         </td> </tr> </table>	802.11b ≤-93dBm@1Mbps ≤-90dBm@11Mbps 802.11g ≤-90dBm@6Mbps ≤-74dBm@54Mbps 802.11n (2.4G) ≤-94.5dBm@MCS0 ≤-76.5dBm@MCS7 ≤-90dBm@MCS8 ≤-72dBm@MCS15 ≤-90dBm@MCS16 ≤-72dBm@MCS23	802.11a ≤-90dBm@6Mbps ≤-72dBm@54Mbps 802.11an(5G) ≤-94.5dBm@MCS0 ≤-70.5dBm@MCS7 ≤-90dBm@MCS8 ≤-66dBm@MCS15 ≤-90dBm@MCS16 ≤-66dBm@MCS23 802.11ac ≤-90.5dBm@MCS0 ≤-60.5dBm@MCS9
802.11b ≤-93dBm@1Mbps ≤-90dBm@11Mbps 802.11g ≤-90dBm@6Mbps ≤-74dBm@54Mbps 802.11n (2.4G) ≤-94.5dBm@MCS0 ≤-76.5dBm@MCS7 ≤-90dBm@MCS8 ≤-72dBm@MCS15 ≤-90dBm@MCS16 ≤-72dBm@MCS23	802.11a ≤-90dBm@6Mbps ≤-72dBm@54Mbps 802.11an(5G) ≤-94.5dBm@MCS0 ≤-70.5dBm@MCS7 ≤-90dBm@MCS8 ≤-66dBm@MCS15 ≤-90dBm@MCS16 ≤-66dBm@MCS23 802.11ac ≤-90.5dBm@MCS0 ≤-60.5dBm@MCS9		
Security			
Encryption	WEP / WPA / WPA2		
Wireless L2 Isolation	Y		
Station Isolation	Y		
IEEE 802.1x Authenticator	Y		
EAP Authentication	EAP-FAST/EAP-SIM/EAP-AKA		
Hidden SSID	Y		
MAC Address Filter	Y		
Wireless STA	Y		
Rogue AP Detection (w/ NMS)	Y		



## 3 x 3 AC Dual-Band Wall-Mount PoE Access Point

### Easy Installation Kit


Wall mount with bracket and magnetic template.

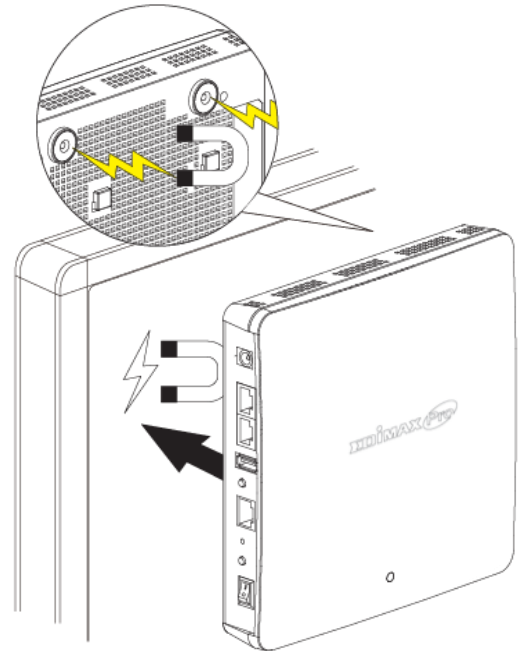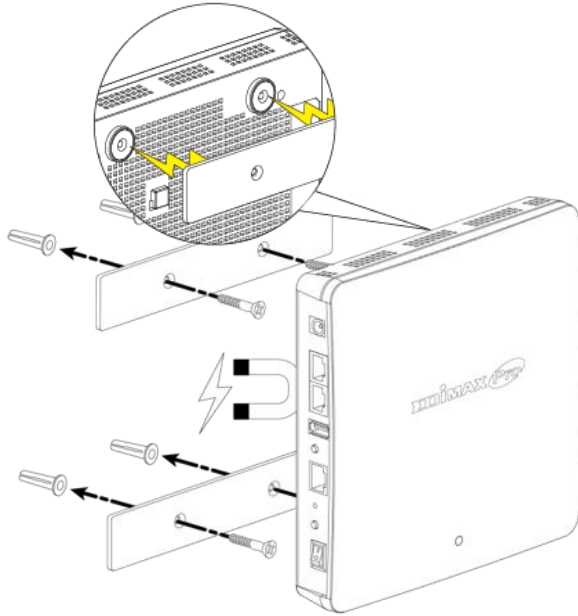

### Optional Accessory: Security Cover (SC1000)

Security Cover for Edimax Pro WAP Series Access Point	
Dimensions (L x W x H)	252.25 x 199 x 28.59 mm
Weight (g)	445g
Environment Condition	Operating Temperature: 0°C (32°F) to 50°C (122°F) Operating Humidity: 90% or Less
Package Content	Security Cover / Mounting Bracket / Screws / Ejector Key / Key / QIG

Network security is a critical concern for any modern business and begins with the hardware itself. Edimax Pro access points can be tampered with a robust security cover and lock, preventing the access point from being tampered with or removed and restricting access to authorized persons only.

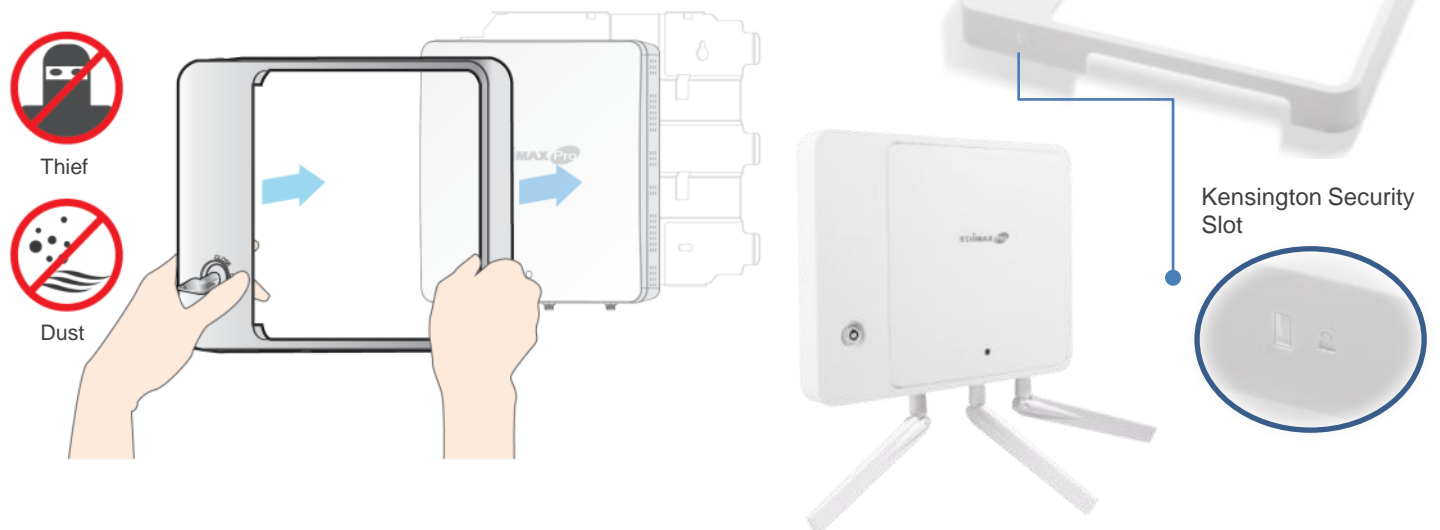

Maximum performance, actual data rates, and coverage will vary depending on network conditions and environmental factors. Product specifications and design are subject to change without notice. Copyright © 2015 Edimax Technology Co. Ltd. All rights reserved.

[www.edimax.com](http://www.edimax.com)