

Short Throw Networkable XGA Projector

For Disruption-Free Presentations

PJD6383s



HDMI®
HIGH DEFINITION MULTIMEDIA INTERFACE

The ViewSonic® PJD6383s is an advanced short throw, networkable DLP® projector designed for classroom and corporate environments. With its short throw lens, the projector can project a 100" image from less than 4 feet. Having the projector close to the screen eliminates cast shadows and blinding light for presenters. PJD6383s delivers amazingly bright, clear images with XGA 1024x768 native resolution, 3,000 ANSI lumens and 15,000:1 high contrast ratio, while BrilliantColor™ technology provides vivid, vibrant colors. This networkable projector is equipped with Crestron® e-Control™ and RoomView Express™, making it easy for IT managers to monitor and control the projector from their workstations. In addition, the projector is AMX® Device Discovery™ certified which further enhances it to be a robust network projector for any size of campus or enterprise. With the new DynamicEco™ technology, presenters can control audiences' focus by dimming the brightness down to 30% with a simple click of the remote. The PJD6383s also comes standard with multiple PC and video inputs including HDMI, 120Hz/3D-Ready and 10w integrated speaker. The PJD6383s short throw, networkable XGA DLP® projector provides remarkable multimedia projection for both education and businesses.

Project Large, Stunning Images in Small Places

The short throw lens enables large images to be projected from short distances in small rooms with space limitations. No distracting shadows on the projected image and no blinding lights in front of the presenters. A screen size of 100-inches from less than 4 feet away.

Bright in Virtually Any Setting With 3000 lumens

Packed with 3000 lumens and a high contrast ratio of 15,000:1 (with DynamicEco™), your presentations are guaranteed to be vibrant even in the brightest office environments.

Network Monitoring and Control


IT admin can monitor, manage and schedule the projector remotely and receive alerts of projector status with integrated Crestron® e-Control™ system and RoomView Express™ management software.

HDMI True Digital Connectivity


HDMI is the highest and future-proof video standard, guaranteed for true digital picture clarity.

DynamicEco™ Technology

Take command of presentations by dimming the main screen image - up to 70% - with DynamicEco™ button on the remote.

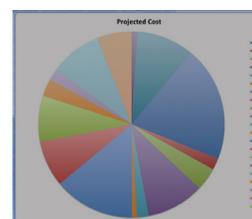

With DynamicEco™

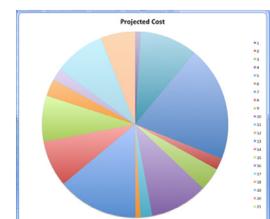

Without DynamicEco™

Short Throw Networkable XGA Projector

PJD6383s



BrilliantColor™ Technology

Latest BrilliantColor technology delivers stunning all digital clarity with life-like colors, sharp graphics and outstanding images. The advanced 6-segment color wheel enhances the yellow color performance that is key to accurate and vivid color reproduction.



3D-Ready Powered by DLP® Link™ Technology

Get amazing 3D capabilities with DLP Link technology, at your disposal. The projector's embedded emitter function makes it easy to unlock 3D capabilities simply with a pair of DLP Link compatible glasses, such as the optional ViewSonic PGD-250 active shutter glass kit.




Long Lamp Life up to 5000 Hours

The new advanced lamp technology extends the lamp life up to 5000 hours* and saves on maintenance costs.

| Projection Distance | | Screen Size (4:3) | |
|---------------------|--------|-------------------|--------|
| Feet | Meters | Inches | Meters |
| 1.3 | 0.4 | 30 | 0.8 |
| 3.3 | 1.0 | 80 | 2.0 |
| 4.8 | 1.5 | 120 | 3.0 |
| 6.1 | 1.9 | 150 | 3.8 |
| 8.1 | 2.5 | 200 | 5.1 |
| 10.2 | 3.1 | 250 | 6.4 |
| 12.2 | 3.7 | 300 | 7.6 |

Optional Accessories

- Replacement Lamp RLC-071
- Short Throw Wall Mount Kit WMK-027
- 3D HD Video Processor VP3D1
- 3D Active Shutter Glasses PGD-250
- Wireless Presentation Gateway WPG-360
- Soft Case PJ-CASE-002
- Extended 5-Year Warranty PRJ-EW-07-02

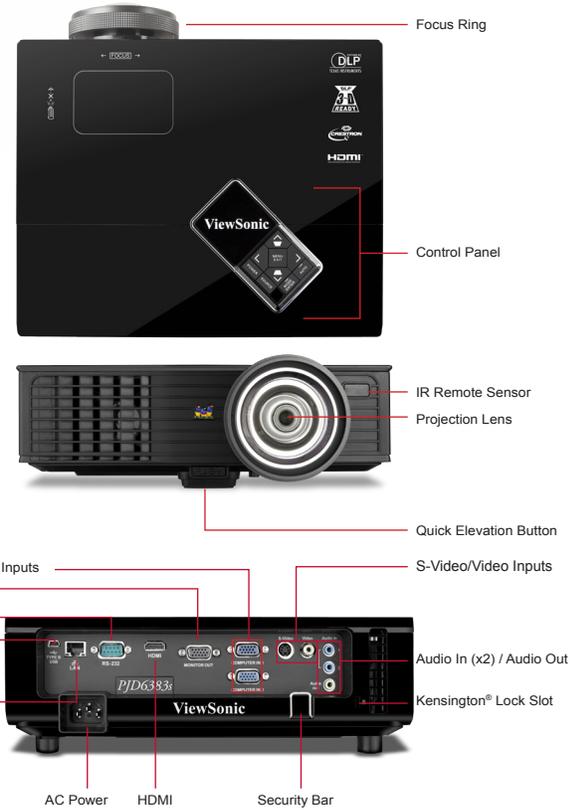

Specifications

| | | |
|----------------------|--|--|
| DISPLAY | Type | 0.55" Digital Micromirror Device (DLP™) |
| | Resolution | XGA 1024x768 (native) |
| | Lens | Fixed optical zoom / manual optical focus |
| | Keystone | Vertical digital keystone correction (+/- 40°) |
| | Size | 30"–300" / 0.8m–7.6m (diagonal) |
| | Throw Distance | 1.22ft–12.15ft / 0.37m–3.7m |
| | Throw Ratio | 0.61:1 |
| | Lamp | 240 watt |
| | Lamp Life (Normal / Eco-mode) | 3500 / 5000* hours |
| | Brightness | 3000 Lumens |
| | Contrast Ratio | 15,000:1 (w/ DynamicEco™) |
| | Aspect Ratio | 4:3 (native), 16:9, Auto |
| | Color Depth | 30 bits, 1.07B Color (10+10+10) |
| Color Wheel | 6-seg RGBCYW/7200rpm | |
| Color Gamut | 94% NTSC1931 CIE | |
| INPUT SIGNAL | Computer and Video | NTSC M (3.58 MHz), 4.43MHz, PAL (B, D, G, H, I, M, N, 60), SECAM (B, D, G, K, K1, L), 480i and 576i, 480p and 576p, 720p, 1080i, 1080p |
| | Frequency | Fh: 31–100KHz, Fv: 48–120Hz |
| COMPATIBILITY | PC | VGA to UXGA |
| | Mac® | Up to SXGA+ (requires MAC adaptor) |
| CONNECTOR | RGB Input | 15-pin mini D-sub (x2) |
| | RGB Output | 15-pin mini D-sub |
| | Digital Output | HDMI 1,3 |
| | Composite Input | RCA jack |
| | Component Input | 15-pin mini D-sub (x2, shared with RGB) |
| | S-video Input | 4-pin mini-DIN |
| | Audio Input | 3.5mm mini jack (x2) |
| | Audio Output | 3.5mm mini jack |
| | Control | RS-232 (DB-9) |
| | Network | RJ-45 |
| USB | Mini B (for mouse control and service) | |
| AUDIO | Speaker | 10W |
| POWER | Voltage | 100–240VAC (Auto Switching), 50/60Hz (universal) |
| | Consumption | 310W (typ) / <1W (stand-by mode) |

| | | |
|-----------------------------|-------------------------------|--|
| CONTROLS | Basic | Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source |
| | OSD | Display, Picture, Source, System Setup (Basic), System Setup (Advanced), Information (See user guide for full OSD functionality) |
| OPERATING CONDITIONS | Temperature | 32°F–104°F (0°C–40°C) |
| | Humidity | 10%–90% (non-condensing) |
| | Altitude | 0–6,000 ft (1,800m), operational up to 10,000 ft (3048m) |
| NOISE LEVEL | Normal / Eco-mode | 33dB / 29dB |
| | DIMENSIONS (W x H x D) | Physical |
| Packaging | | 14.2 x 15 x 7.6 in. / 360 x 380 x 192 mm |
| WEIGHT | Net | 6.6 lb. / 3.0 kg |
| | Gross | 9.9 lb. / 4.5 kg |
| REGULATIONS | | CB, UL, cUL, FCC (including ICES-003), CE, UL-Argentina, NOM, GS, GOST-R, SASO, Ukraine, PSB, C-Tick, Korean-KC, CCC, CECP, WEEE, RoHS |
| WARRANTY | | 3-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service** |

What's in the box?

ViewSonic PJD6383s projector, power cable, VGA cable, remote control with batteries, Lense Cap, Quick Start Guide, ViewSonic Wizard DVD (with User Guide).



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

*Lamp life may vary based on actual usage and other factors. **One year Express Exchange® service requires product registration. Programs, specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. DLP® and DLP logo are registered trademarks of Texas Instruments and BrilliantColor™ is a trademark of Texas Instruments. Copyright © 2012 ViewSonic Corporation. All rights reserved. [16091-02B-09/12] PJD6383s