

FLX UC 500 USB Conference Phone



**Unified Communications
Products for the Enterprise**

HEAR EVERY WORD



*Softphones,
Messenger,
Video Conferencing
and Webinars Applications
are supplementing or
replacing conventional
telephony systems
for Enterprise
Communications*





Laptop Speaker and Microphone
Difficult for even a single user to hear or be heard
Users must crowd around the computer to be heard



Current Conferencing Limitations



USB Powered Conference Phones

Speaker audio is too low to support conference rooms

Users must crowd around the system to be heard

Unable to cancel echo consistently

Innovative Design

Two Speaker Elements

*Intuitive Capacitive
Touch Buttons for
Volume, Mute And
Call Control*



*Four Directional
Microphones for
Complete 360°
Audio Pickup*

- First USB audio device capable of providing the volume levels required for conference room use and online collaboration
 - **10+ conference participants**
- First USB audio device that provides full-duplex wideband audio, allowing simultaneous audio playback and audio capture
 - **Full duplex – real conversations**
- High power tweeter and mid-woofer speaker elements ensure superior audio quality
 - **Hi and Low frequencies**
- Four embedded beam-forming microphone array with integrated echo cancellation ensures complete and intelligible audio capture
 - **Everybody can be heard**



*Winner 2014 Internet Telephony
Product of the Year*

UC 500 is a 15 Watt system with the power supply provided

*Significantly
Higher
Volume
Output than
USB powered
devices*



*AC Adapter
removes
potential
cutback from
speaker draw*

Competitor solutions that are powered via USB drive the speaker with only around 1 Watt

Mini-USB 2.0 Connector, USB 3.0 Compatible
Supports Windows, Mac, and Chromebook Platforms



Standard Interface & Audio Drivers

With FLX UC 500 Utility, Capacitive Touch Buttons Support Hang up and Answer Call control directly from the device

Vidyo

Microsoft Lync

Cisco IP Communicator

Cisco Jabber

X-lite



Skype

WebEx

GoToMeeting


Google Hangouts

Broadsoft UC One


Sales Contacts



- **Curtiss Singleton**
(978) 610-4430
Director, NAM Sales
csingleton@revolabs.com
- **Tom Henkel**
(631) 553-1466
Northeast
thenkel@revolabs.com
- **Tim Droddy**
(978) 610-4034
Southeast/Ohio Valley
tdroddy@revolabs.com
- **John Butler**
(978) 610-4033
Central
jbutler@revolabs.com
- **Jim Vanderhoof**
(978) 610-4037
West
jvanderhoof@revolabs.com

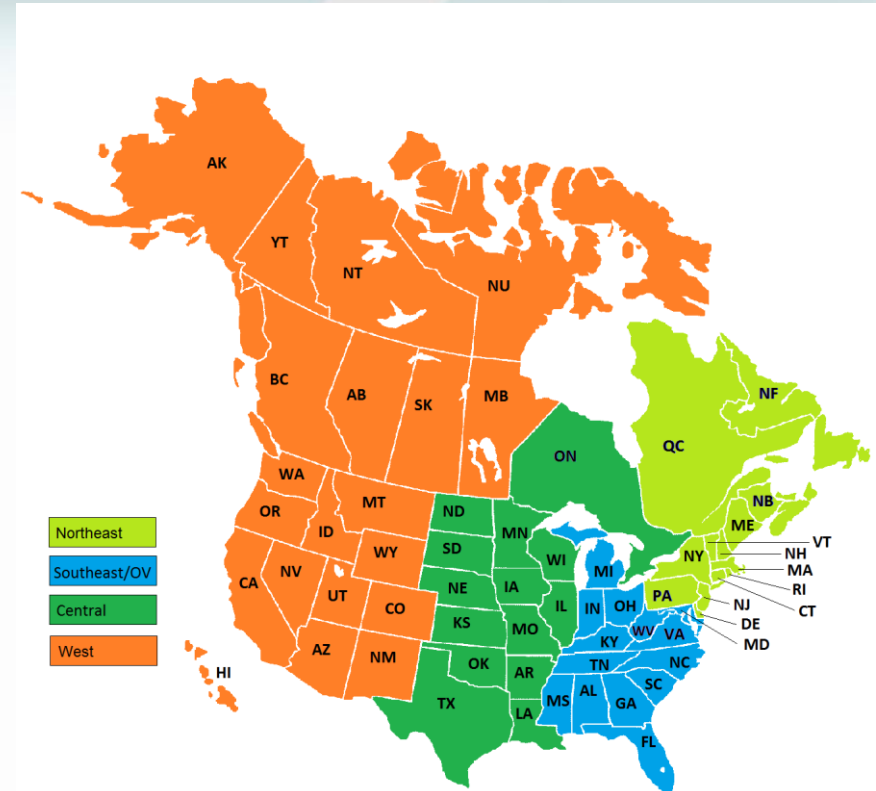


- Daniel Kleman
(978) 610-4025
Senior FSE, West
dkleman@revolabs.com
- Jon McGarry
(978) 610-4028
Northeast FSE
jmccgarry@revolabs.com
- Tim Mackie
(978) 610-4433
South FSE
tmackie@revolabs.com
- Ryan Shannon
(978) 610-3992
Midwest FSE
rshannon@revolabs.com

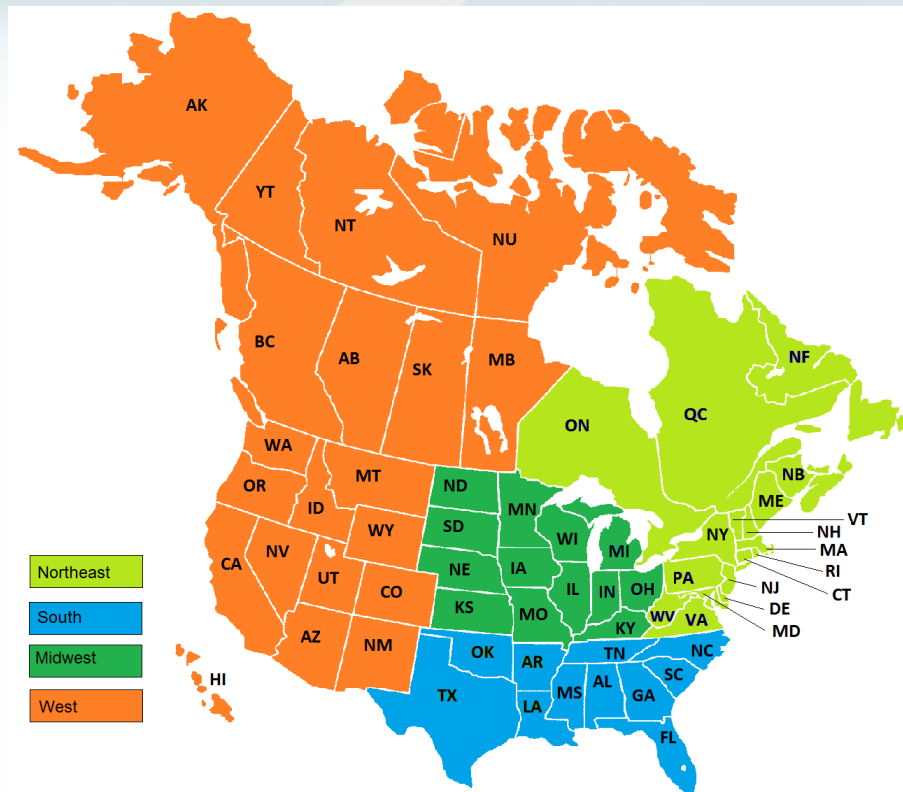

EMEA Sales Contacts

- **Russell Harpham**
+44 7970518430
Director, EMEA
rharpham@revolabs.com
- **Philip Stanley**
+44 7557194540
Sales - UK & Ireland
pstanley@revolabs.com
- **Annabelle Wellon**
+44 7977453365
Sales - UK
awellon@revolabs.com
- **Eli Demey**
+32 468 228884
Sales – Central Europe
edemey@revolabs.com
- **Geoff Hellyer**
+44 7917468996
Field Sales Engineer, Europe
ghellyer@revolabs.com

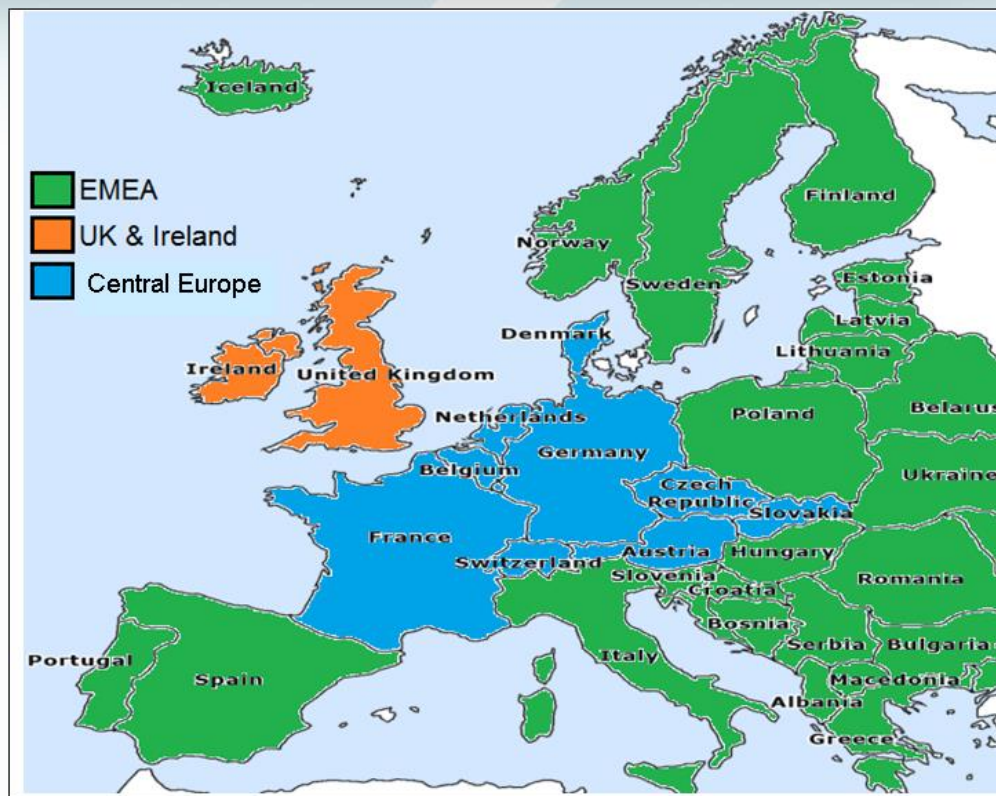

APAC & IME Sales Contacts



- **Peter Ho**
+65 9780 0526
Director, APAC, ANZ, India
pho@revolabs.com
- **Russell Harpham**
+44 1189036155
Director, EMEA
rharpham@revolabs.com
- **Sabrina Guo Yu**
Sales – China
sguo@revolabs.com
- **Bali Reddy**
+97 148011500
Sales – Middle East
breddy@revolabs.com
- **Maddiboina Venugopal**
+91 97040 44480
Sales – South India
venu@revolabs.com
- **S.L. Dorairaju**
+97 90910892
Sales – North India
sldorairaju@revolabs.com
- **Henry Lee**
+852 9130 4885
Field Sales Engineer, APAC
hlee@revolabs.com
- **Cody Zhang**
+86 381 1225543
Field Sales Engineer, China
czhang@revolabs.com
- **Namit Saxena**
+91 9818389734
Field Sales Engineer, India
nsaxena@revolabs.com



UC 500 Product Summary & Specifications

[FLX UC 500 Data Sheet](#)



- Speaker Elements
 - Two elements including mid-woofer and tweeter
 - Frequency Response: 160 – 20,000 Hz
 - Max SPL: 91dB at 1m
- Four Built In Directional Microphones
 - 360° audio pickup
 - Frequency Response: 160 – 12,000 Hz
 - Individual Echo Cancellation per Microphone
- Full Duplex
- Connection & Audio Control
 - Volume Control with Audio Feedback
 - Accept & Hang Up Call Control Buttons
 - Microphone Mute

- Mini-USB 2.0 Connector
 - USB 2.0 and USB 3.0 Compatible
- Power
 - Input 15V, 1A External Power Supply
- Environmental Conditions
 - Operating temperature: 32 – 104 °F (0 - 40 °C)
 - Relative humidity: 20%-85% (noncondensing)
 - Storage temperature: -22°F to +131 °F (-30°C to +55 °C)
- Dimensions
 - 123mm H x 150mm W x 150mm L
 - 4.84in H x 5.9in W x 5.9in L
- Weight
 - 2.2 lb (1 kg)