28" Full HD Multimedia LED Monitor with HDMI

Stunning Color Performance
with SuperClear® Pro MVA Panel Technology

If you're looking for stunning color at a great value, look no further than the ViewSonic® VA2855Smh monitor. Designed with SuperClear Pro MVA panel technology, this large 28" monitor delivers incredibly brilliant color at almost any viewing angle. And we didn't stop there, we added an integrated HDMI port and great sound so you can have the ultimate multimedia experience. Also, our exclusive ViewMode™ feature lets you select the optimal screen setting for different applications, while Flicker-free and Blue Light filter technology eliminates eyestrain so you can work or play for extended periods of time.

Key Features:

Large 28" screen size for increased productivity

SuperClear® Pro MVA panel technology for richer colors, better color gradients, and sharper images

Full HD1080p resolution provides superior pixel performance

Flexible connectivity options include HDMI and VGA inputs

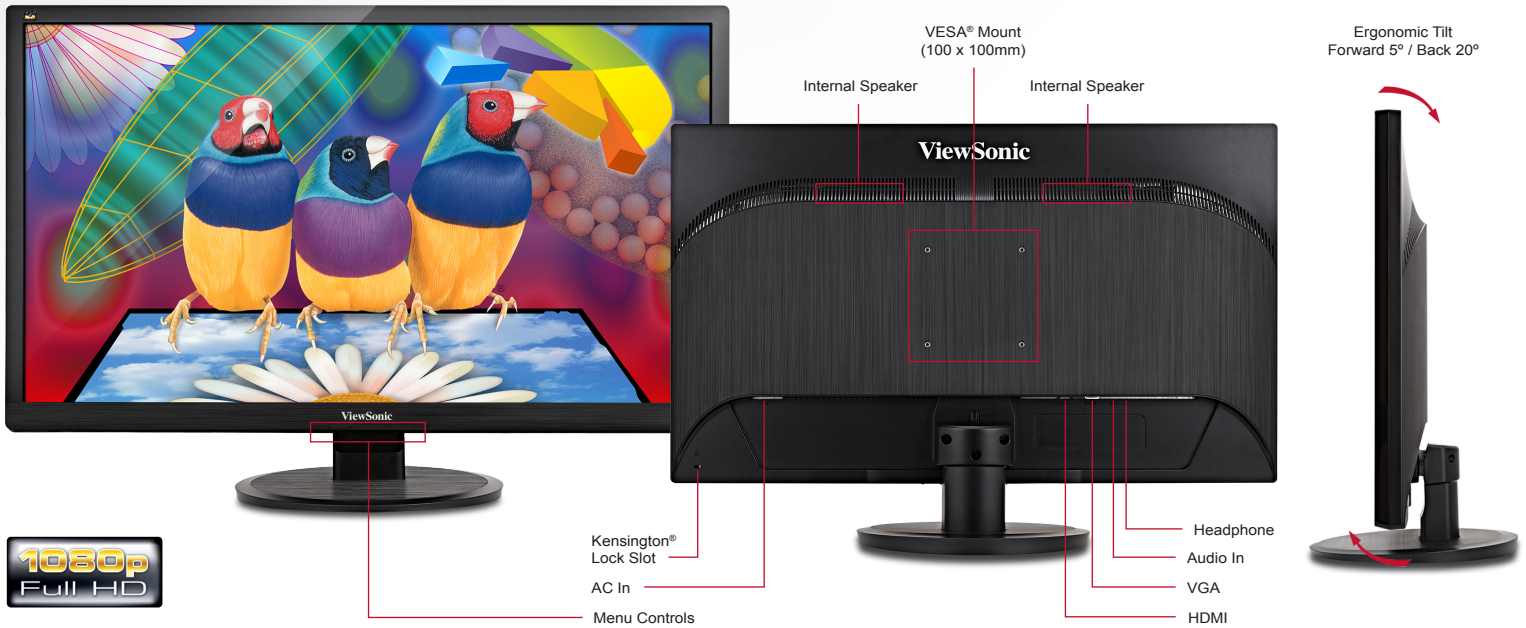**Exclusive ViewMode technology delivers superior color rendering and intuitive settings**

Designed for:

Home entertainment

Business

28" Full HD Multimedia LED Monitor with HDMI

ViewSonic®
See the difference®

VA2855Smh

VESA® Mount
(100 x 100mm)

Internal Speaker   Internal Speaker

Ergonomic Tilt
Forward 5º / Back 20º

ViewSonic

Kensington®
Lock Slot

AC In

Menu Controls

Headphone

Audio In

VGA

HDMI

1080p Full HD

Specifications

LCD PANEL		
	Type	Color a-Si Active Matrix TFT LCD
	Display Area	24.4" horizontal x 13.4" vertical; 28.0" diagonal
	Optimum Resolution	1920x1080
	Brightness	300 cd/m² (typ.)
	Contrast Ratio	3,000:1 (typ.)
	Viewing Angles	178º horizontal, 178º vertical
	Colors	16.7M (true 8-bit)
	Response Time	6.5ms (GTG)
	Backlight	White-light LED
	Backlight Life	40,000 hours (min.)
	Panel Surface	Anti-glare, hard-coating (3H)

VIDEO INPUT		
	Digital	VGA, HDMI
	Frequency	Fh: 24~82kHz, Fv: 50~75Hz
	Sync	Separate Sync, Composite Sync, Sync on Green

AUDIO OUTPUT		
	Speakers	2-watt (x2)

COMPATIBILITY		
	PC	Up to 1920x1080 non-interlaced
	Mac®	Up to 1920x1080

CONNECTOR		
	Video In	VGA, HDMI
	Audio In	3.5mm mini jack
	Headphone	3.5mm mini jack
	Power	External power adapter

CONTROLS		
	Front Panel Buttons	Power, 1, Up, Down, 2
	OSD	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

ERGONOMICS		
	Tilt	Forward 5º / Back 23º

POWER		
	Voltage	AC 100–240V (universal), 50 / 60Hz
	Consumption	32W (typ.) / 42W (max.)
	Optimize	26W (typ.)
	Conserve	20W (typ.)

OPERATING CONDITIONS		
	Temperature	32–104º F (0–40º C)
	Humidity	10–90% (non-condensing)

DIMENSIONS (W x H x D)		
	Physical with Stand	26.0 x 17.8 x 9.8 in. / 659.7 x 452.6 x 249.7 mm
	Physical without Stand	26.0 x 15.4 x 1.9 in. / 659.7 x 391.0 x 49.3 mm
	Packaging	28.7 x 20.7 x 5.8 in. / 730 x 527 x 148 mm

WEIGHT		
	Net with Stand	11.7 lb. / 5.3 kg
	Net without Stand	10.4 lb. / 4.7 kg
	Gross	15.9 lb. / 7.2 kg

WALL MOUNT		
	VESA	100 x 100mm

REGULATIONS		
		WHQL, CE, CB, RoHS, REACH, WEEE, TCO, UL, UL, FCC-B, ES 6.0, EPEAT SILVER, NRCan

RECYCLE/DISPOSAL		
		Please dispose of in accordance with local, state, or federal laws

WARRANTY		
		Three-year limited warranty on parts, labor and backlight

Optional Accessories

ViewSonic HDMI male to DVI male cable 1.8 meter CB-00008948

What's in the box?

VA2855Smh monitor, Power cable, VGA cable, Quick Start Guide

www.viewsonic.com

RoHS COMPLIANT™   ENERGY STAR   epeat SILVER™   LED   ECO mode™   SuperCLEAR® Image Enhancement Technology   HDMI HIGH DEFINITION MULTIMEDIA INTERFACE   TÜV NORD

ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TÜV NORD.